



**VENTILATION SOLUTIONS**

# Most Popular Series Extractor Fans

## Trickle Impregnation Technology

- Sealed motor against dust and moisture
- High temperature resistant electric motor
- Maximum isolation characteristics
- Longlivity of the electric motor



# MM SERIES

## EXTRACTOR FANS

Bathroom fans are the most popular and affordable modern solution for the removal of moisture from wet rooms and the prevention of mold and fungus formation.

**MM Series – Bathroom and WC fans featuring modern design,** high airflow rate and uncompromising quality. These fans provide continuous or interrupted ventilation in the sanitary facilities at extremely low power consumption.

They can be used to purge air from small and medium-sized residential, office and commercial premises or as heat exchangers between adjacent premises.

The fans are mounted on walls, ceilings and suspended ceilings and are attached to air ducts or pipes of the building's ventilation system with connection diameters 100 mm, 120 mm and 150 mm.


## SAFETY

The MM Series fans are made of high-quality and harmless materials, and they comply with noise and fire safety standards.

The protection degree of the built-in electric motor is IP 24, IP X4, IP X5 and IP 56 which enables the fan to normally operate in high humidity environment. All models from this series are fitted with an insect protection net. It is possible to equip the fans with back shutter, timer, humidity and light sensors, and built-in LED lighting.

The fans are connected to single-phase grid by a switch or dimmer to control the speed. Fans can be custom manufactured for other power supply voltages.

Low voltage LV 12V models, guaranteeing high safety level, could be mounted near the shower area (zone 1 of the scheme) or connected to shower cabins.

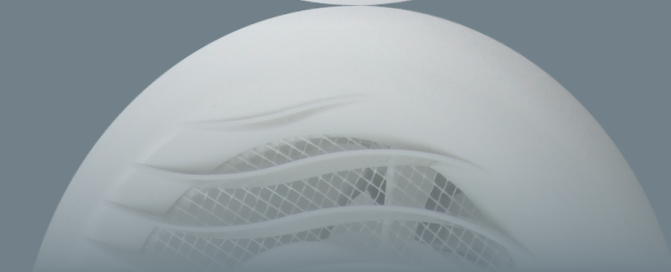

## Energy-efficient

**MM UE** - Energy-efficient low-noise fans with IP X5 protection degree and a flow rate of up to 85m<sup>3</sup>/h and 100m<sup>3</sup>/h which consume only 5,5W/h.



Series with double capsulated ball bearings NSK Japan which guarantee 30 000 hours of continuous operation.

# What we need to know about ours safety when selecting and installing a fan?

## Bathroom Zone Regulations



### SAFETY

For your safety, we recommend using a low voltage (12V) LV series fans in ZONE 1.

The 230V fans are safe to install in ZONE 2 and 3.



### Basic model

The base model is available with or without an auto-closing back



### Timer

The fan will operate when the light switch is switched on or from a separate pull-cord switch.

The built-in timer will ensure operation for 15 minutes after the light is switched off.



### Humidistat & Timer

The fan will operate when its switched on or when the humidity in the premises reaches over 70%. The timer ensures operation for 15 minutes after the humidity is reduced below 70%.



### Light Relay & Timer

The fan will operate when the room is lit while the built-in timer ensures operation for 15 minutes after the light is off.



### LED lights

Model with LED luminous band. Available in 5 colors, respectively:



### Ultra economical

Energy-efficient low-noise fans.



### Back Shutter

Automatic closing shutter preventing the entry of unpleasant odors and insects available as an optional accessory.




# MM SERIES


## MM CLQ 100



### Dimensions /mm/

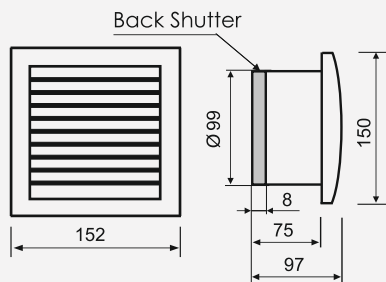

### Performance curves

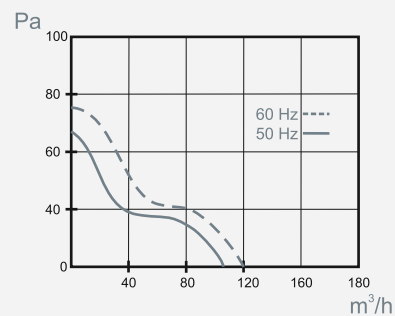

## Technical characteristic

Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light
	<b>No</b>	<b>No</b>	Hz / V	min <sup>-1</sup>	W	m³/h	IP	dB	Zone	°C					
MM CLQ 100	1023	1047	50 / 230	2430	13	105	24	29	2,3	+40	•				
MM CLQ 100 T	-	1122										•			
MM CLQ100 HT	-	1146										•	•		
MM CLQ 100 LT	-	1139										•		•	
MM CLQ 100 LED	-	8961													•

## MM CLQB 100



**BLACK**

## MM CLQE 100



**ECRU**

## MM CLQI 100



**INOX**

Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /
MM CLQB 100	1825	1733	MM CLQE 100	1610	1627	MM CLQI 100	1498	1481
MM CLQB 100T	-	0613	MM CLQE 100T	-	0583	MM CLQI 100T	-	0552
MM CLQB 100HT	-	0637	MM CLQE 100HT	-	0606	MM CLQI 100HT	-	0576
MM CLQB 100LT	-	0620	MM CLQE 100LT	-	0590	MM CLQI 100LT	-	0569
MM CLQB 100LED	-	-	MM CLQE 100LED	-	-	MM CLQI 100LED	8558	-

## Legend

MM CLQ 100 LV T HT LT LED UE C

MM CLQ	Series name	T	Timer	UE	Noiseless - Energy Efficient
100	Size	HT	Humidistat & Timer	C	Back Shutter /Accessory/
LV	Low Voltage Fan 12V	LT	Light Relay & Timer		
		LED	LED Light		



Products without a code are custom made

HEAT RECOVERY

DOMESTIC FANS

SAUNA FANS

AXIAL FANS

DUCT FANS

INDUSTRIAL FANS




# MM SERIES


## MM CLQ 100



### Dimensions /mm/

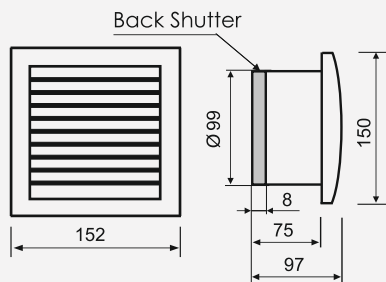

### Performance curves

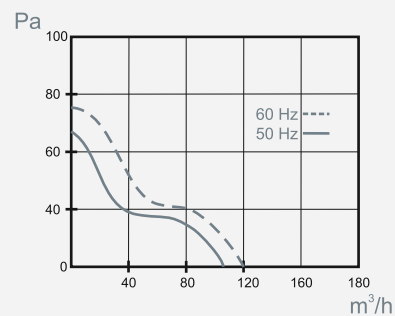

## Technical characteristic

Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light
	<b>No</b>	<b>No</b>	Hz / V	min <sup>-1</sup>	W	m³/h	IP	dB	Zone	°C					
MM CLQ 100	1023	1047	50 / 230	2430	17	169	56	29	2,3	+60	•				
MM CLQ 100 T	-	1122										•			
MM CLQ100 HT	-	1146										•	•		
MM CLQ 100 LT	-	1139										•		•	
MM CLQ 100 LED	-	8961													•

## MM CLQB 100



**BLACK**

## MM CLQE 100



**ECRU**

## MM CLQI 100



**INOX**

Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /
MM CLQB 100	1825	1733	MM CLQE 100	1610	1627	MM CLQI 100	1498	1481
MM CLQB 100T	-	0613	MM CLQE 100T	-	0583	MM CLQI 100T	-	0552
MM CLQB 100HT	-	0637	MM CLQE 100HT	-	0606	MM CLQI 100HT	-	0576
MM CLQB 100LT	-	0620	MM CLQE 100LT	-	0590	MM CLQI 100LT	-	0569
MM CLQB 100LED	-	-	MM CLQE 100LED	-	-	MM CLQI 100LED	8558	-

## Legend

MM CLQ 100 LV T HT LT LED UE C

MM CLQ	Series name	T	Timer	UE	Noiseless - Energy Efficient
100	Size	HT	Humidistat & Timer	C	Back Shutter /Accessory/
LV	Low Voltage Fan 12V	LT	Light Relay & Timer		
		LED	LED Light		



Products without a code are custom made

HEAT RECOVERY

DOMESTIC FANS

SAUNA FANS

AXIAL FANS


DUCT FANS

INDUSTRIAL FANS


## MM Q 100



## Dimensions /mm/

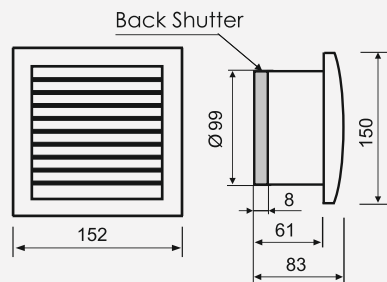

## Performance curves

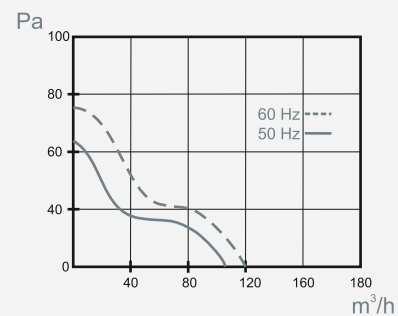

## Technical characteristic

Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light	Low Voltage 12V
	No	No	Hz / V	min <sup>-1</sup>	W	m <sup>3</sup> /h	IP	dB	Zone	°C						
MM Q 100	-	1368	50 / 230	2750	17	105	X4	32	2,3	+60	●					
MM Q 100 T	-	0842										●				
MM Q 100 HT	-	0866										●	●			
MM Q 100 LT	-	0859										●		●		
MM Q 100 LED	-	7124													●	
MM Q 100 LV	-	7643	50 / 12	2750	17	105	X4	32	1,2,3	+60						●

## MM QB 100



BLACK

## MM QE 100



ECRU

## MM QI 100



INOX

Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /
MM QB 100	-	0408	MM QE 100	-	4574	MM QI 100	-	1573
MM QB 100T	-	-	MM QE 100T	-	-	MM QI 100T	-	-
MM QB 100HT	-	-	MM QE 100HT	-	-	MM QI 100HT	-	3942
MM QB 100LT	-	-	MM QE 100LT	-	-	MM QI 100LT	-	-
MM QB 100LED	-	-	MM QE 100LED	-	-	MM QI 100LED	-	-

## Legend

MM Q 100 LV B T HT LT LED UE C

MM Q	Series name	T	Timer	UE	Noiseless - Energy Efficient
100	Size	HT	Humidistat & Timer	C	Back Shutter /Accessory/
LV	Low Voltage Fan 12V	LT	Light Relay & Timer		
B	Basic Model	LED	LED Light		




Products without a code are custom made


## MM X 100



## Dimensions /mm/

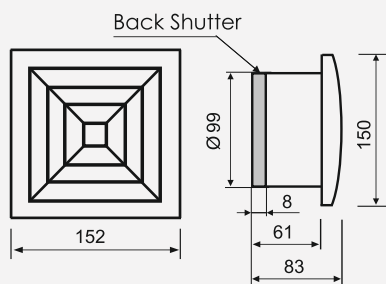


## Performance curves

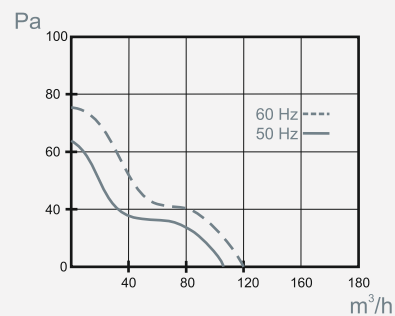

## Technical characteristic

Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light	Noiseless Energy Efficient
	<b>No</b>	<b>No</b>	Hz / V	min <sup>-1</sup>	W	m <sup>3</sup> /h	IP	dB	Zone	°C						
MM X 100	9005	8992	50 / 230	2750	17	105	X4	32	2,3	+60	●					
MM X 100 T	-	-										●				
MM X 100 HT	-	-										●	●			
MM X 100 LT	-	-										●		●		
MM X 100 LED	-	-													●	
MM UE X 100	-	9098	50 / 230	2020	5,5	100	X5	25	2,3	+60						●

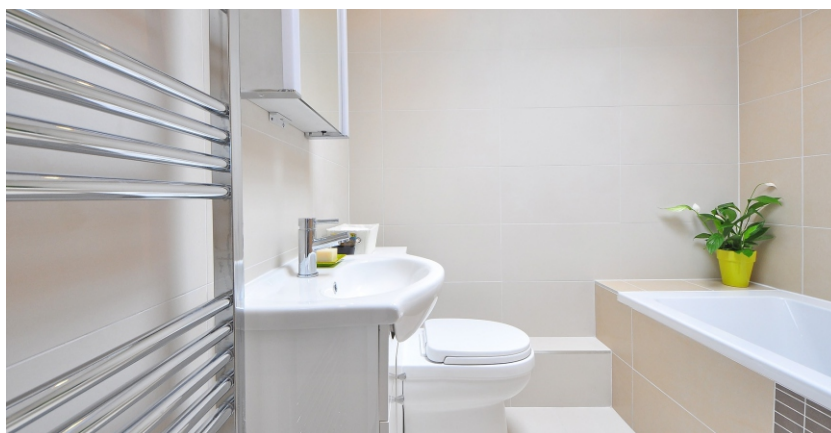

## Legend

MM X 100 LV B T HT LT LED UE C

MM X	Series name	T	Timer	UE	Noiseless - Energy Efficient
100	Size	HT	Humidistat & Timer	C	Back Shutter /Accessory/
LV	Low Voltage Fan 12V	LT	Light Relay & Timer		
B	Basic Model	LED	LED Light		



Products without a code are custom made




# MM SERIES


## MM RCL 100



### Dimensions /mm/

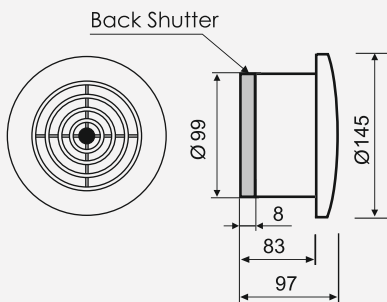

### Performance curves

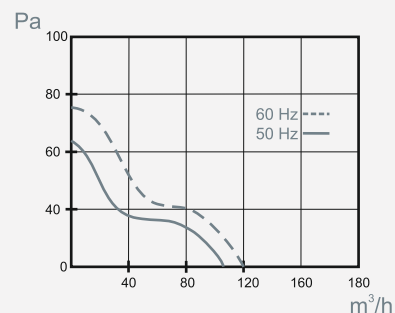

## Technical characteristic

Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light
	<b>No</b>	<b>No</b>	Hz / V	min <sup>-1</sup>	W	m³/h	IP	dB	Zone	°C					
MM RCL 100	1016	1030	50 / 230	2430	13	105	24	29	2,3	+40	•				
MM RCL 100 T	-	-										•			
MM RCL 100 HT	-	-										•	•		
MM RCL 100 LT	-	-										•		•	
MM RCL 100 LED	-	3973													•

## MM RCLI 100



**INOX**

## MM RCLB 100



**BLACK**

**LED SERIES**



Colours

Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /
MM RCLI 100	1474	1467	MM RCLB 100	1818	4437
MM RCLI 100T	-	-	MM RCLB 100T	-	4468
MM RCLI 100HT	-	-	MM RCLB 100HT	-	4529
MM RCLI 100LT	-	0736	MM RCLB 100LT	-	4499
MM RCLI 100LED	-	-	MM RCLB 100LED	-	-

## Legend

MM RCL 100 LV B T HT LT LED UE C

MM RCL	Series name	T	Timer	UE	Noiseless - Energy Efficient
100	Size	HT	Humidistat & Timer	C	Back Shutter /Accessory/
LV	Low Voltage Fan 12V	LT	Light Relay & Timer		
B	Basic Model	LED	LED Light		



Products without a code are custom made

HEAT RECOVERY

DOMESTIC FANS

SAUNA FANS

AXIAL FANS


DUCT FANS

INDUSTRIAL FANS


## MM R 100



## Dimensions /mm/

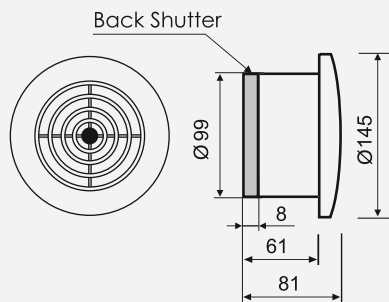

## Performance curves

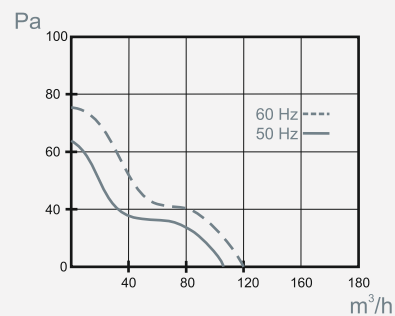

## Technical characteristic

Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light	Low Voltage 12V
	No	No	Hz / V	min <sup>-1</sup>	W	m³/h	IP	dB	Zone	°C						
MM R 100	-	1900	50 / 230	2750	17	105	X4	32	2,3	+60	•					
MM R 100 T	-	0415										•				
MM R 100 HT	-	0439										•	•			
MM R 100 LT	-	0422										•		•		
MM R 100 LED	-	3973													•	
MM R 100 LV	-	9807	50 / 12	2750	17	105	X4	32	1,2,3	+60						•

## MM RI 100



INOX

## MM RC 100



BLACK



Colours



Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /
MM RI 100	-	0392	MM CE 100	-	4437
MM RI 100T	-	-	MM CLQE 100T	-	4468
MM RI 100HT	-	-	MM CLQE 100HT	-	4529
MM RI 100LT	-	0736	MM CLQE 100LT	-	4499
MM RCLI 100LED	-	4307	MM CLQE 100LED	-	4246

## Legend

MM R 100 LV B T HT LT LED UE C

MM R	Series name	T	Timer	UE	Noiseless - Energy Efficient
100	Size	HT	Humidistat & Timer	C	Back Shutter /Accessory/
LV	Low Voltage Fan 12V	LT	Light Relay & Timer		
B	Basic Model	LED	LED Light		




Products without a code are custom made

# MM SERIES


## MM V 100



### Dimensions /mm/

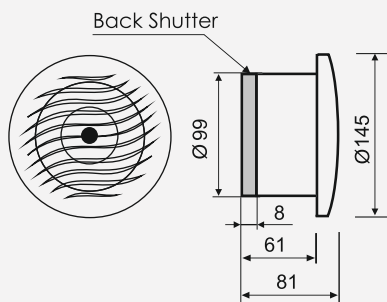

### Performance curves

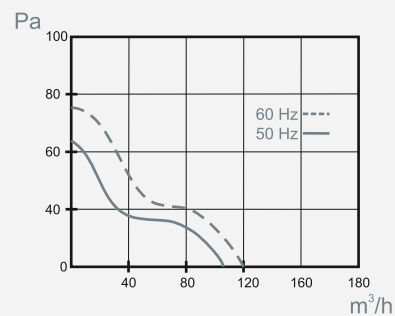

## Technical characteristic

Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate r.p.m.	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light	Low Voltage 12V
	No	No	Hz / V	min <sup>-1</sup>	W	m³/h	IP	dB	Zone	°C						
MM V 100	-	1931	50 / 230	2750	17	105	X4	32	2,3	+60	•					
MM V 100 T	-	0446										•				
MM V 100 HT	-	0453										•	•			
MM V 100 LT	-	0460										•		•		
MM V 100 LED	-	3980													•	
MM V 100 LV	-	-	50 / 12	2750	17	105	X4	32	1,2,3	+60						•

## MM VI 100



INOX

## MM VB 100



BLACK



LED SERIES

Colours

Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /
MM VI 100	-	3935	MM VB 100	-	4444
MM VI 100T	-	3959	MM VB 100T	-	4475
MM VI 100HT	-	-	MM VB 100HT	-	4536
MM VI 100LT	-	0873	MM VB 100LT	-	4505
MM VI 100LED	-	-	MM VB 100LED	-	-

## Legend

MM V 100 LV B T HT LT LED UE C

MM V	Series name	T	Timer	UE	Noiseless - Energy Efficient
100	Size	HT	Humidistat & Timer	C	Back Shutter /Accessory/
LV	Low Voltage Fan 12V	LT	Light Relay & Timer		
B	Basic Model	LED	LED Light		



Products without a code are custom made

HEAT RECOVERY

DOMESTIC FANS

SAUNA FANS

AXIAL FANS

DUCT FANS

INDUSTRIAL FANS




# MM SERIES


## MM VC 100



### Dimensions /mm/

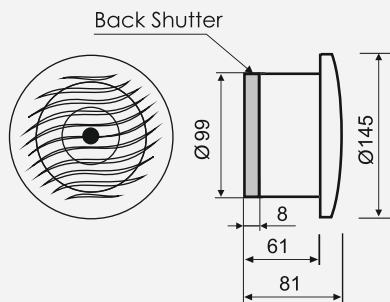

### Performance curves

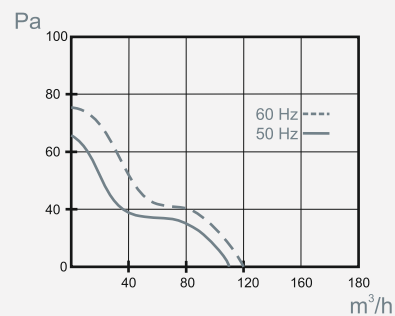

## Technical characteristic

Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light	Low Voltage 12V
	No	No	Hz / V	min <sup>-1</sup>	W	m³/h	IP	dB	Zone	°C						
MM VC 100B	-	0316	50 / 230	2790	18	110	X4	39	2,3	+60	•					
MM VC 100T	-	2556										•				
MM VC 100HT	-	2570										•	•			
MM VC 100LT	-	2563										•		•		
MM VC 100LED	-	7162													•	
MM VC 100 LV	-	-	50 / 12	2790	18	110	X4	39	1,2,3	+60						•

## MM RC 100




CHROME

## MM Q BC 100



BLACK-CHROME

### Dimensions /mm/

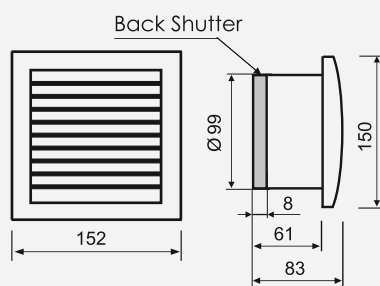

Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /
MM RCI 100	-	0323	MM Q BC 100	-	0743
MM RC 100T	-	2587	MM Q BC 100T	-	2617
MM RC 100HT	-	2600	MM Q BC 100HT	-	2631
MM RC 100LT	-	2594	MM Q BC 100LT	-	2624
MM RC 100LED	-	8107	MM Q BC 100LED	-	7131

## Legend

MM VC 100 LV B T HT LT LED UE C

MM VC	Series name	T	Timer	UE	Noiseless - Energy Efficient
100	Size	HT	Humidistat & Timer	C	Back Shutter /Accessory/
LV	Low Voltage Fan 12V	LT	Light Relay & Timer		
B	Basic Model	LED	LED Light		



Products without a code are custom made

HEAT RECOVERY

DOMESTIC FANS

SAUNA FANS

AXIAL FANS


DUCT FANS

INDUSTRIAL FANS


## MM VG 100



## Dimensions /mm/

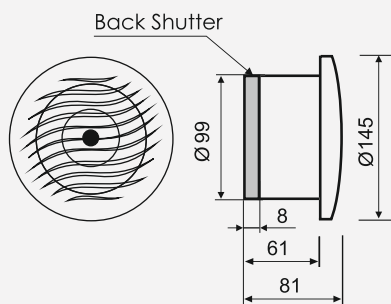


## Performance curves

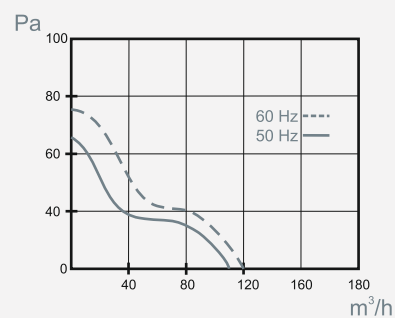

## Technical characteristic

Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light	Low Voltage 12V
	No	No	Hz / V	min <sup>-1</sup>	W	m³/h	IP	dB	Zone	°C						
MM VG 100B	-	5946	50 / 230	2790	18	110	X4	32	2,3	+60	•					
MM VG 100T	-	4543										•				
MM VG 100HT	-	4567										•	•			
MM VG 100LT	-	4550										•		•		
MM VG 100LED	-	4017													•	
MM VG 100 LV	-	-	50 / 12	2790	18	110	X4	39	1,2,3	+60						•

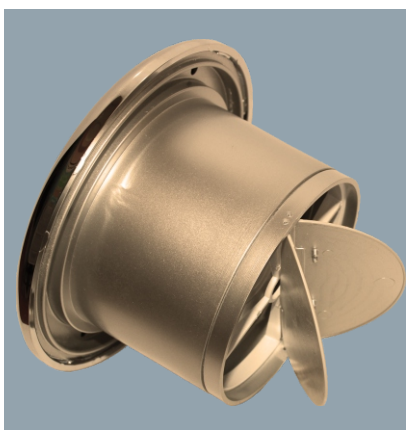

## Legend

MM VG 100 LV B T HT LT LED UE C

MM VG	Series name	T	Timer	UE	Noiseless - Energy Efficient
100	Size	HT	Humidistat & Timer	C	Back Shutter /Accessory/
LV	Low Voltage Fan 12V	LT	Light Relay & Timer		
B	Basic Model	LED	LED Light		




Products without a code are custom made


## MM Q 120



## Dimensions /mm/

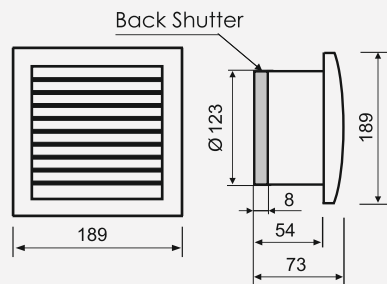


## Performance curves

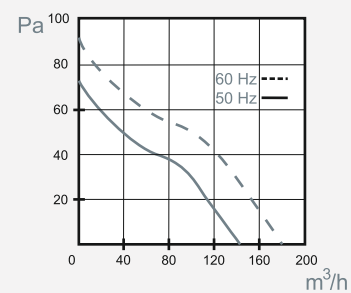

## Technical characteristic


Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light	2 Speed Fan
	<b>No</b>	<b>No</b>	Hz / V	min <sup>-1</sup>	W	m³/h	IP	dB	Zone	°C						
MM Q 120	1078	1085	50 / 230	2650	18	150	X4	42	2,3	+60	●					
MM Q 120T	-	1184										●				
MM Q 120HT	-	1221										●	●			
MM Q 120LT	-	1207										●		●		
MM Q 120LED	-	-									●				●	
MM Q 120-2S	0217	-	50 / 230	1250	4	75	X4	32	2,3	+60	●					●

## MM QB 120

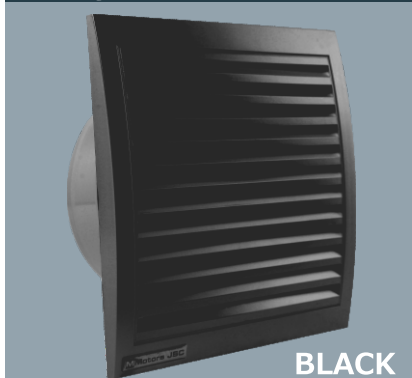

BLACK

## MM QBI 120

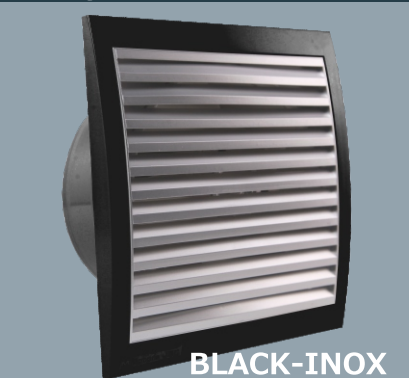

BLACK-INOX

## MM QI 120



INOX

Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /
MM QB 120	1856	1863	MM QBI 120	1948	1955	MM QI 120	1535	1528
MM QB 120T	-	0750	MM QBI 120T	-	4314	MM QI 120T	-	0675
MM QB 120HT	-	0774	MM QBI 120HT	-	7155	MM QI 120HT	-	0699
MM QB 120LT	-	0767	MM QBI 120LT	-	4321	MM QI 120LT	-	0682
MM QB 120LED	-	-	MM QBI 120LED	-	-	MM QI 120LED	-	-

## Legend

MM Q 100 LV B T HT LT LED UE C

MM Q	Series name	T	Timer	UE	Noiseless - Energy Efficient
100	Size	HT	Humidistat & Timer	C	Back Shutter /Accessory/
LV	Low Voltage Fan 12V	LT	Light Relay & Timer		
B	Basic Model	LED	LED Light		




Products without a code are custom made




## MM R 120



## Dimensions /mm/

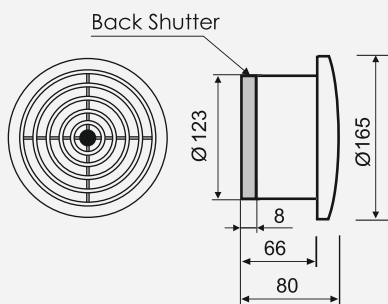

## Performance curves



## Technical characteristic

Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light
	<b>No</b>	<b>No</b>	Hz / V	min <sup>-1</sup>	W	m³/h	IP	dB	Zone	°C					
MM R 120	1054	1061	50 / 230	2650	18	150	X4	42	2,3	+60					
MM R 120T	-	-													
MM R 120HT	-	-													
MM R 120LT	-	-													
MM R 120LED	-	-													

## MM RI 120



Type	Product Code	Product Code with Back Shutter / Accessory /
MM RI 120	1511	1504
MM RI 120T	-	-
MM RI 120HT	-	-
MM RI 120LT	-	-
MM RI 120LED	-	-



## Legend

MM RI 100 LV B T HT LT LED UE C

MM RI	Series name	T	Timer	UE	Noiseless - Energy Efficient
100	Size	HT	Humidistat & Timer	C	Back Shutter /Accessory/
LV	Low Voltage Fan 12V	LT	Light Relay & Timer		
B	Basic Model	LED	LED Light		




Products without a code are custom made


## MM Q 150



### Dimensions /mm/

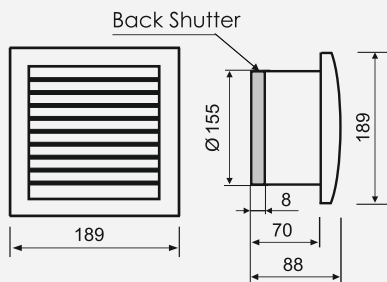


### Performance curves

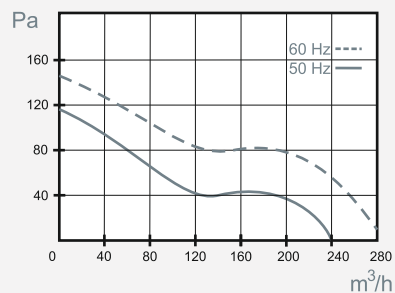

## Technical characteristic


Type	Product Code	Product Code with Back Shutter / Accessory /	Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Protection Degree	Noise Level	Safety Zone	Max Air Temperature	Basic fan	Timer	Humidistat	Light Relay	LED Light
	<b>No</b>	<b>No</b>	Hz / V	min <sup>-1</sup>	W	m³/h	IP	dB	Zone	°C					
MM Q 150B	1269	1320	50 / 230	2650	46	240	X4	51	2,3	+60	•				
MM Q 150T	-	1337										•			
MM Q 150HT	-	1351										•	•		
MM Q 150LT	-	1344										•		•	
MM Q 150LED	-	-									•				•

## MM QB 150

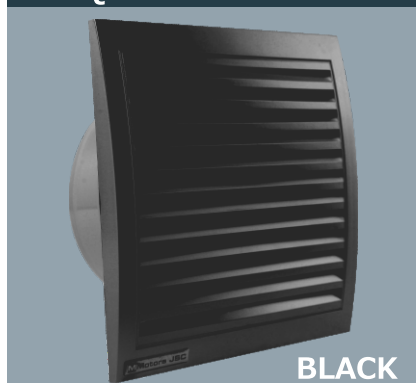

BLACK

## MM QBI 150

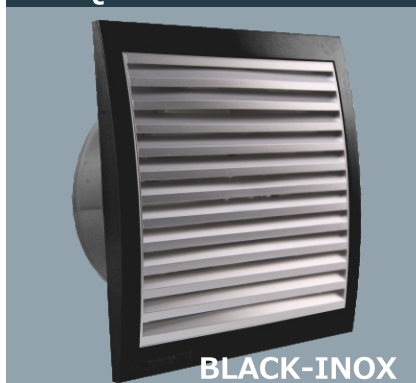

BLACK-INOX

## MM QI 150



INOX

Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /	Type	Product Code	Product Code with Back Shutter / Accessory /
MM QB 150	1870	1887	MM QBI 150	1962	1979	MM QI 150	1542	1559
MM QB 150T	-	0811	MM QBI 150T	-	4406	MM QI 150T	-	0781
MM QB 150HT	-	0835	MM QBI 150HT	-	4420	MM QI 150HT	-	0804
MM QB 150LT	-	0828	MM QBI 150LT	-	4413	MM QI 150LT	-	0798
MM QB 150LED	-	-	MM QBI 150LED	-	-	MM QI 150LED	-	-

## Legend

MM X 100 LV B T HT LT LED UE C

MM X	Series name	T	Timer	UE	Noiseless - Energy Efficient
100	Size	HT	Humidistat & Timer	C	Back Shutter /Accessory/
LV	Low Voltage Fan 12V	LT	Light Relay & Timer		
B	Basic Model	LED	LED Light		



Products without a code are custom made



[www.mmotors.bg](http://www.mmotors.bg)